


Do not scale. All dimensions in mm. Check all dimensions on site.



FIRST FLOOR STRUCTURE PLAN - INDICATIVE

Scale 1:50 @ A3 | Ground floor walls below shown grey dashed; joists by Acorn Timber Engineering

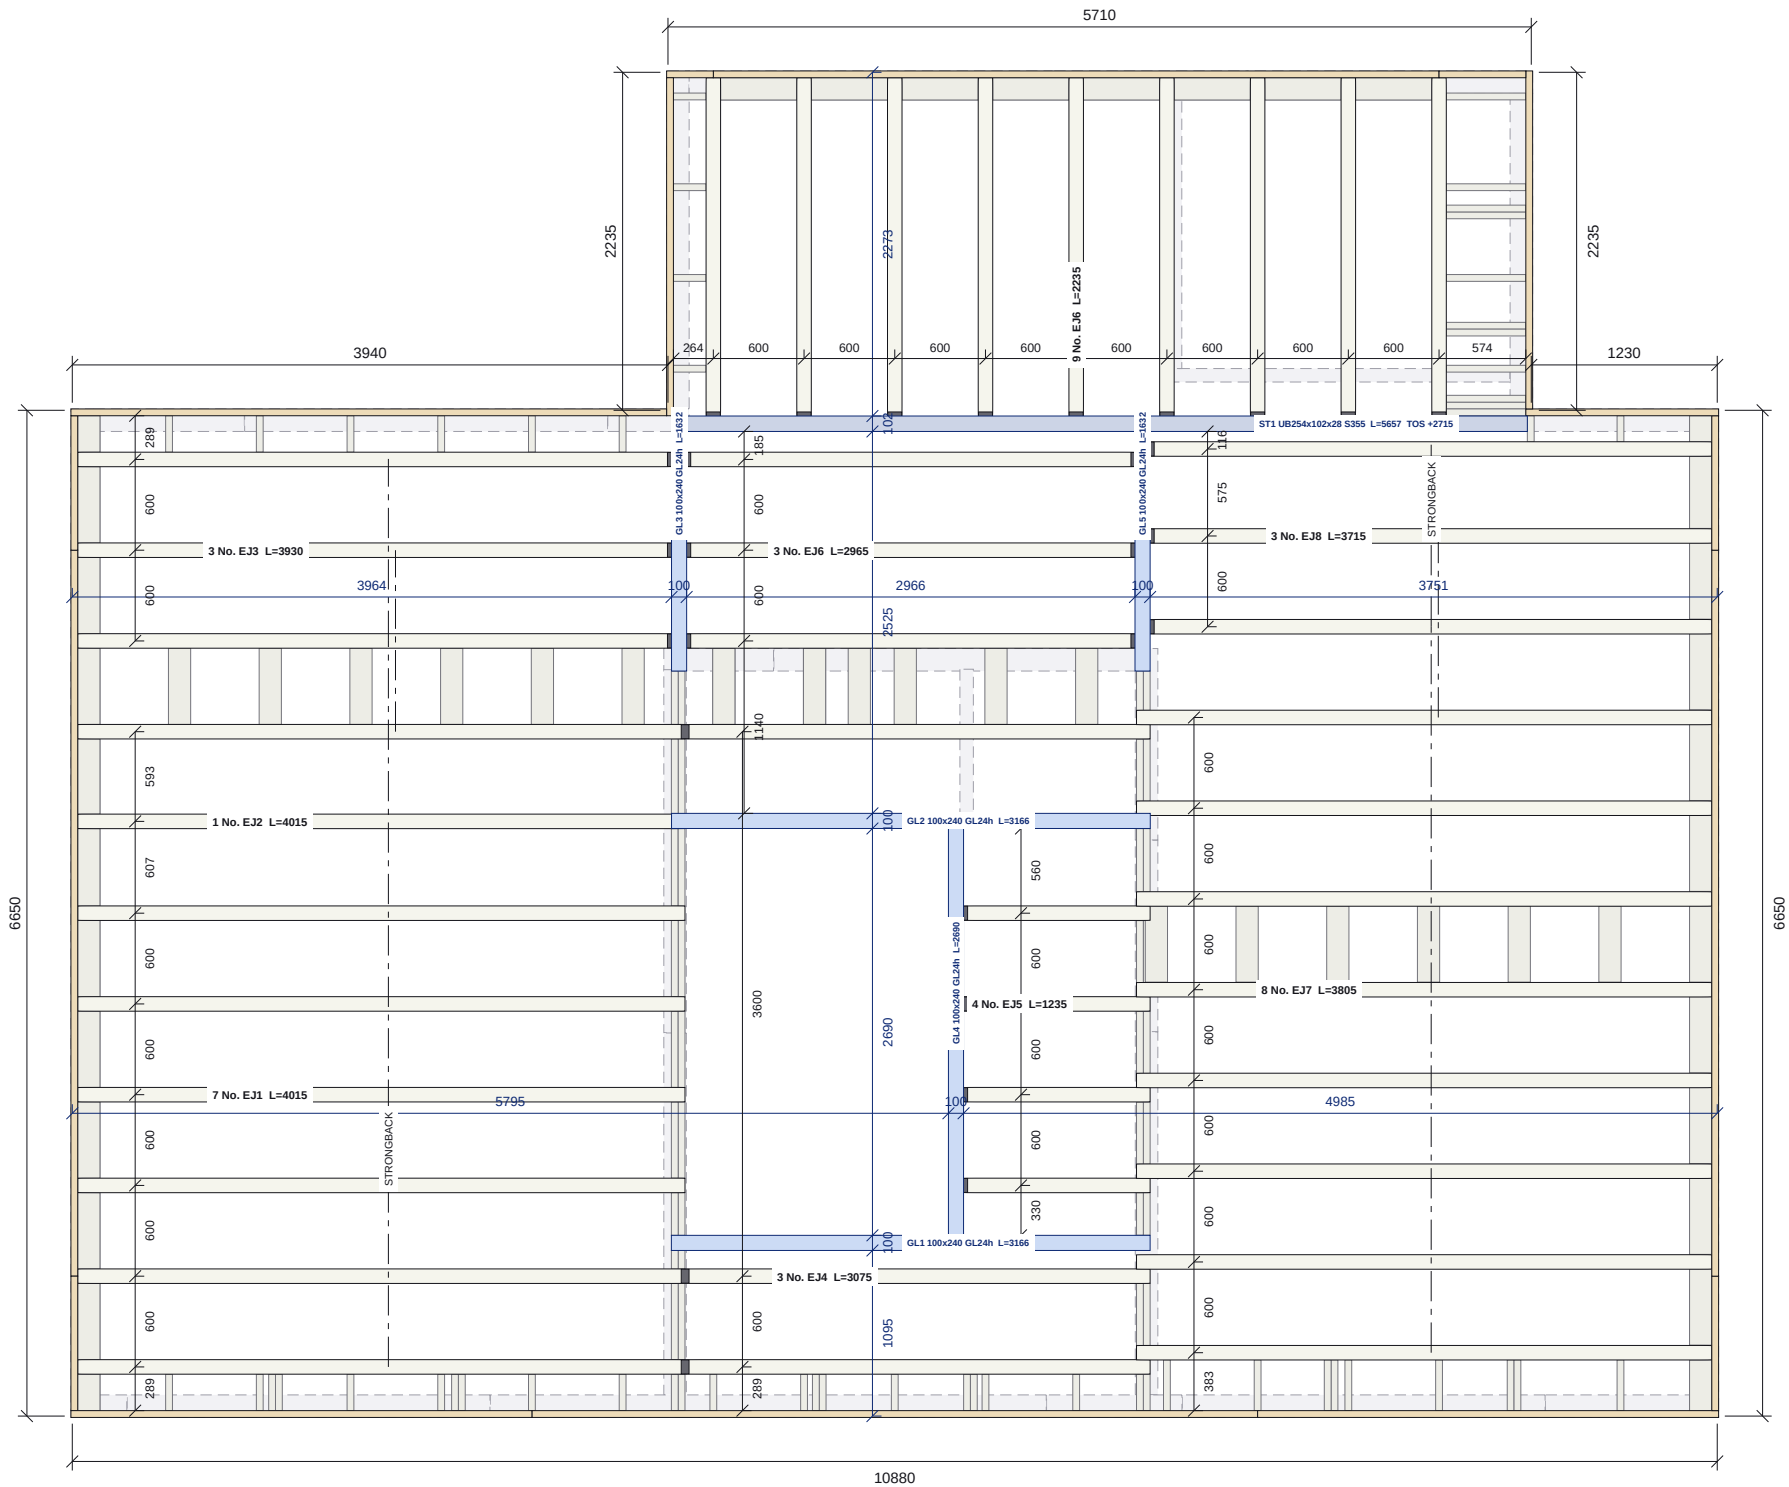

FIRST FLOOR STRUCTURE SCHEDULES

BEAMS

Mark	Section	Length	No.
GL1	100x240 GL24h	3166	1
GL2	100x240 GL24h	3166	1
GL3	100x240 GL24h	1632	1
GL4	100x240 GL24h	2690	1
GL5	100x240 GL24h	1632	1
ST1	UB254x102x28 S355 (TLS supply)	5657	1
PK	14mm marine ply packer, 100 wide	12.1m	5

PK: 14mm marine ply fixed to the top of each 240mm glulam to give the full 254mm floor depth (240 + 14 = 254, flush with the joists and edgebinder). Glulam and steel supplied by TLS; set out to faces as dimensioned; bearings to engineer. Steel TOS above underside of sole plate.

METAL-WEB JOISTS - BY ACORN

Type	Section	Length	No.
EJ1	97x254 metal web	4015	7
EJ2	97x254 metal web	4015	1
EJ3	97x254 metal web	3930	3
EJ4	97x254 metal web	3075	3
EJ5	97x254 metal web	1235	4
EJ6	97x254 metal web	2235	9
EJ6	97x254 metal web	2965	3
EJ7	97x254 metal web	3805	8
EJ8	97x254 metal web	3715	3

Acorn Timber Engineering supply, with 28 hangers, 2 strongback runs and noggins. Not in TLS procurement. Indicative; Acorn's layout supersedes.

EDGEBINDER, WAIST BAND, BREATHER

Item	Quantity	Order
Edgebinder 254 (45x195 + 45x59 rip)	39.4m	10 x 4.8m 45x195
45x59 C24 ribs, 3 per 45x195	39.4m	4 x 4.8m 45x195
45x195 C24 total		14 x 4.8m
OSB/3 waist band 290x9	17 strips	5 x 1197x2397
Breather 450 x 2.7m strips, 150 lap	16 strips	17 (1 roll)

Run = modelled edgebinders. Timber cut-optimised +5%; OSB +7.5%; membrane laps +5%.

FLOOR DECKING

Item	Area	Order
22mm Egger P5 600x2400	80.8 m2	61 sheets
D4 adhesive 1L (per 6.5 sheets)		10 x 1L

Laid area from the model (25 full sheets + 55 cut pieces) = 56.1 sheets, +7.5%.

NOTES

- INDICATIVE ONLY. Metal-web joists, hangers, strongbacks and noggins are designed and supplied by Acorn Timber Engineering; this drawing is superseded by Acorn's engineered floor layout on receipt.
- Glulam beams 100x240 GL24h (dark blue) set out to the faces dimensioned, bearing on multi-ply studs to engineer's drawing 26-431-S-0001. 14mm marine ply fixed to the top of each 240mm glulam to give the full 254mm floor depth. Steel UB254x102x28 S355 supplied by TLS.
- Edgebinder 254mm = 45x195 C24 with a 45x59 C24 rip fixed on top (rips cut 3 per 45x195, 3mm kerf).
- OSB/3 waist band 290x9 to the outer face of the edgebinder, strips ripped 4 per 1197x2397 sheet.
- Breather membrane over the waist band in 450 deep x 2.7m strips, each lapped 150 over the next.
- 22mm Egger P5 flooring glued with D4 adhesive, fixed to Acorn's specification. Dimensions to frame and beam faces.

REVISIONS

REV	DATE	DESCRIPTION
C01	13.09.26	Construction issue



TLS TIMBER FRAME

Design & Manufacture

Scan: 3D model + drawings



CLIENT MP Adams	PROJECT MP Adams Plot 3, Eckington
--------------------	---------------------------------------

FIRST FLOOR STRUCTURE - INDICATIVE

Beams, set-out and metal-web joist positions; Acorn layout supersedes

SCALE 1:50	SIZE A3	DATE 13.09.26	DRAWN TS
---------------	------------	------------------	-------------

STATUS CONSTRUCTION	DRAWING No. P3-FL-01	REV C01
------------------------	-------------------------	------------